

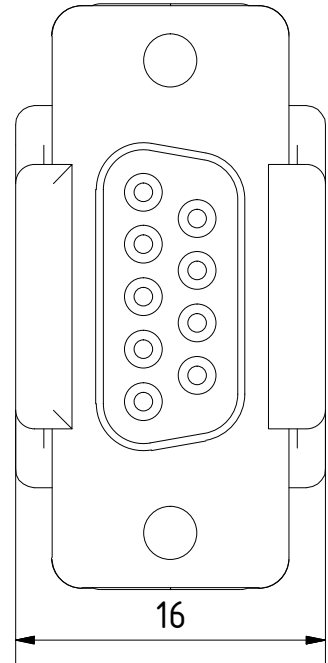
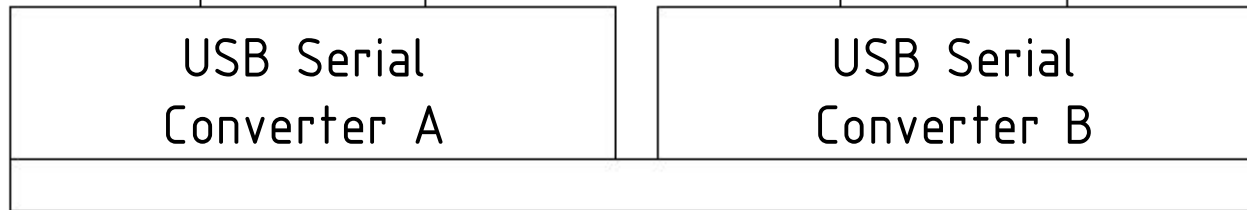
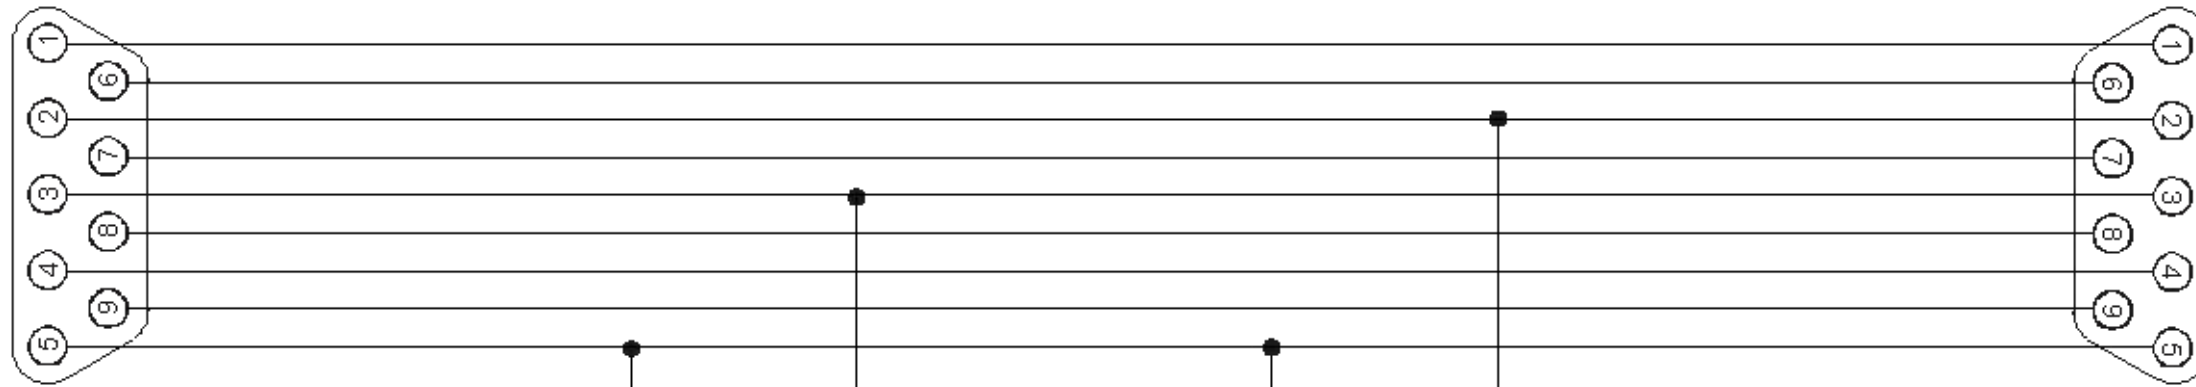


Device 1
Sub D9
female


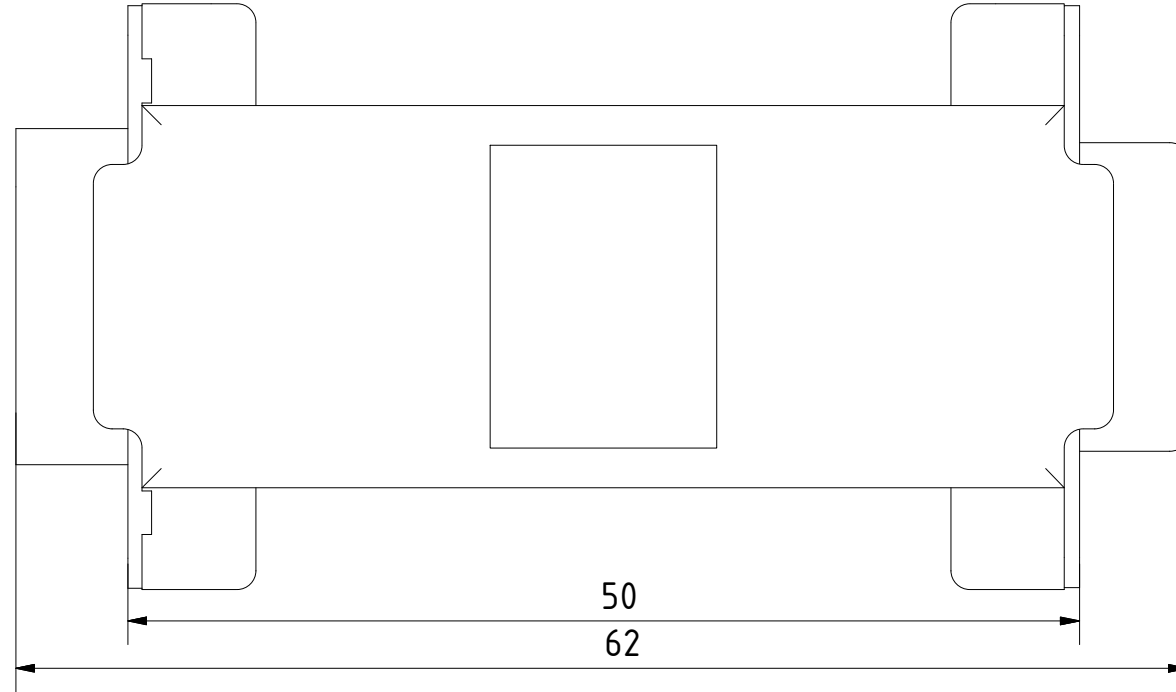



Device 2
Sub D9
male

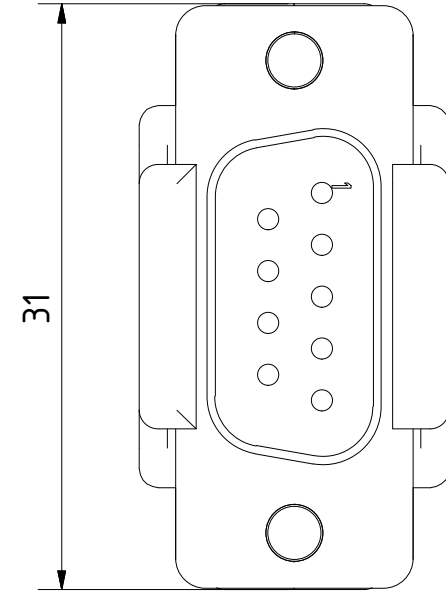

Monitoring Data Rate: up to 230400 bps
 Comm. Settings Support: 7 / 8 bit data, 1 / 2 stop bits, Odd/Even/Mark/Space/ No Parity
 Serial Converters: Dual Channel Serial Converter A/B
 Power consumption: Typical 35mA at 5V = 165 mW
 Operating temperature: -40°C to 85°C
 Certifications: CE approval
 Standard Compliance: RoHS
 WEEE-Reg.-Nr. DE: 91575955

Mini USB

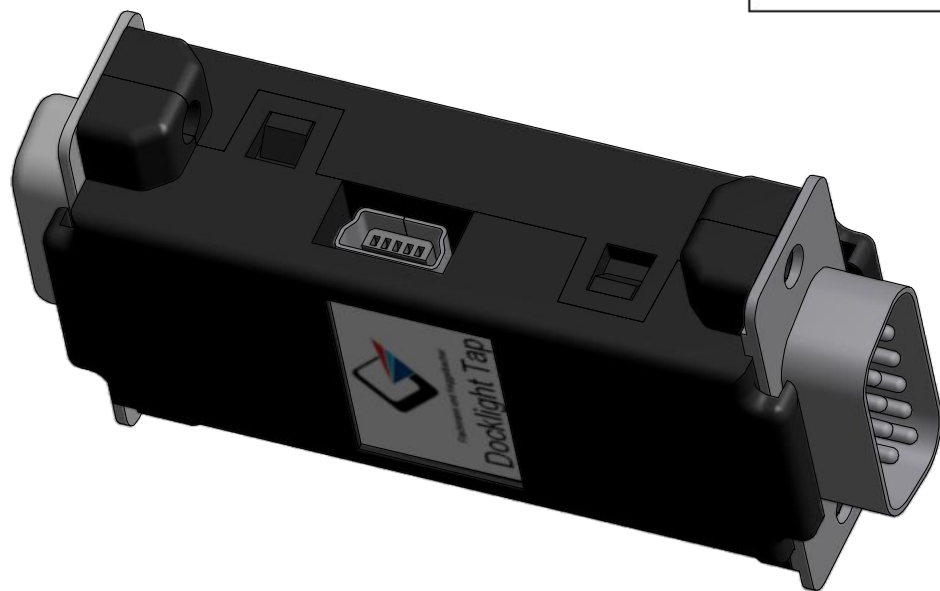

				Toleranzen nach DIN ISO 2768-1c	Maßstab	Oberfläche:
						Material:
				Datum	Name	Docklight Tap with 1.8m "Mini-B" USB cable
				Bearb. 2022-07-10	MF	
				Geprüft 2022-07-10	OH	
				Norm		# 300314147
				 www.fuh-edv.de		
03	Update WEEE Reg.No.	10.07.22	MF			Artikel-Nr.: A3
02	correction: baudrate 921600 Bit/s, WEEE Reg.No.	29.09.16	MF			
01	First release	30.03.09	MF			
Zust.	Änderungen	Datum	Name	Flachmann und Heggelbacher		I:\Docklight-Tap\Docklight-Tap.dwg