

Tap Signal Level
 0 - RS232 / TTL
 2 - RS232 / TTL inverted


Tap Signal Level
 1 - RS422 / 485

Pin No.	Signal Name	Description
1	DCD	Data Carrier Detect
2	RX	Receive Data
3	TX	Transmit Data
4	DTR	Data Terminal Ready
5	GND	Signal Ground
6	DSR	Data Set Ready
7	RTS	Request To Send
8	CTS	Clear To Send
9	RI	Ring Indicator

Pin No.	Signal Name	Description
1	TX+	Transmit Data
2	TX-	Transmit Data
3	RTS+	Request To Send
4	RTS-	Request To Send
5	GND	Signal Ground
6	RX+	Receive Data
7	RX-	Receive Data
8	CTS+	Clear To Send
9	CTS-	Clear To Send


Monitoring Data Rate: 300 bps to 2 Mbps
 Comm. Settings Support: 7 / 8 bit data, 1 / 2 stop bits, Odd/Even/Mark/Space/ No Parity
 Operating temperature: -40°C to 85°C
 Certifications: CE approval
 Compliances: RoHS, REACH
 WEEE-Reg.-Nr. DE: 91575955

Docklight and Docklight Scripting Project Settings:
 Docklight Monitoring Mode
 Receive Channel 1 = VTP0
 Receive Channel 2 = VTP1
 (or similar VTP index as shown in the dropdown list)

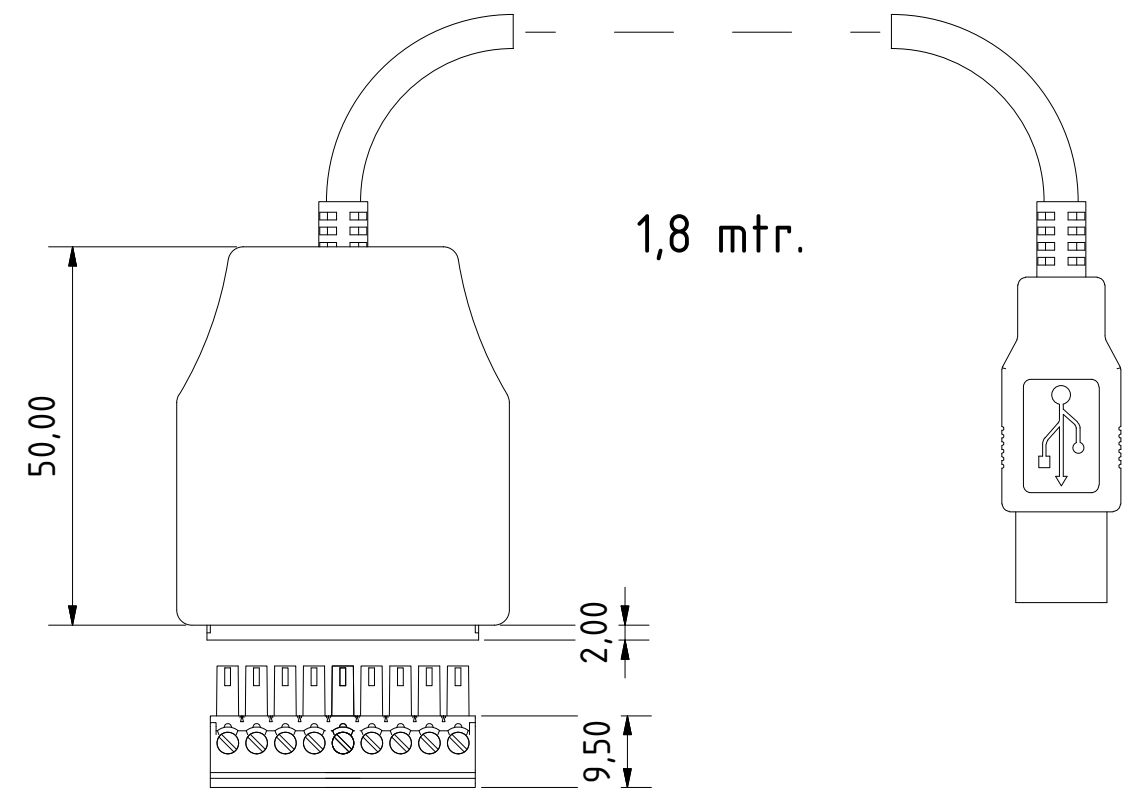

including
 MC 1,5/ 9-ST-3,81
 Phoenix connector

USB
 Type A

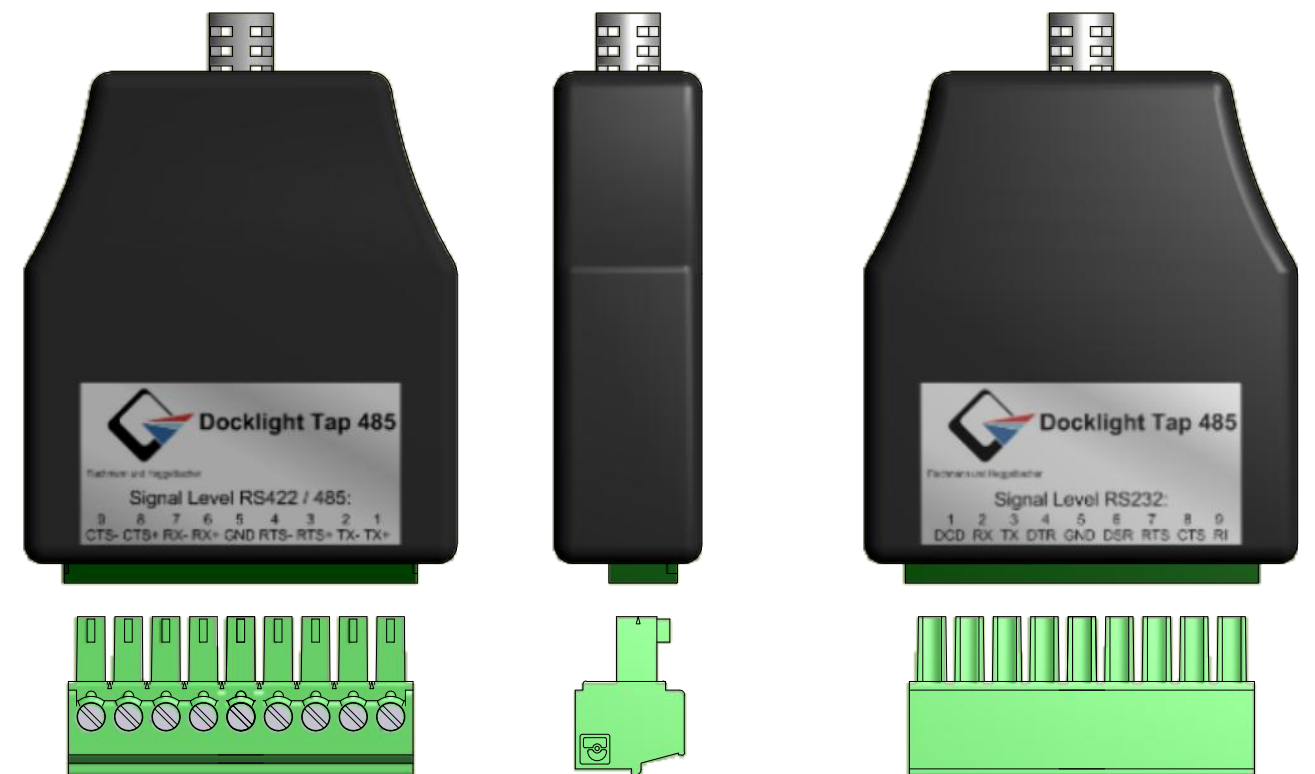

		Toleranzen nach DIN ISO 2768-1m		Maßstab	Oberfläche:	
					Material:	
		Datum		Name		Docklight Tap 485
		Bearb.	2022-07-10	MF		
		Geprüft	2022-07-10	OH		
05	Update WEEE Reg.No.	10.07.22	MF	Norm		
04	added project settings	28.07.19	MF			
03	correction: baudrate 2MBit/s, WEEE Reg.No.	29.09.16	MF			
02	correction: signal level, layout	11.10.2015	MF			
01	First release	31.05.14	MF			
Zust.	Änderungen	Datum	Name	Flachmann und Heggelbacher		Artikel-Nr.: #300694651
				www.fuh-edv.de		1 / 1
						A3
				I:\Docklight-Tap\Docklight-Tap485_Datasheet.idw		