


Tap Signal Level
 0 - RS232 / TTL
 2 - RS232 / TTL inverted

Tap Signal Level
 1 - RS422 / 485

| Pin No. | Signal Name | Description |
|---------|-------------|---------------------|
| 1 | DCD | Data Carrier Detect |
| 2 | RX | Receive Data |
| 3 | TX | Transmit Data |
| 4 | DTR | Data Terminal Ready |
| 5 | GND | Signal Ground |
| 6 | DSR | Data Set Ready |
| 7 | RTS | Request To Send |
| 8 | CTS | Clear To Send |
| 9 | RI | Ring Indicator |

| Pin No. | Signal Name | Description |
|---------|-------------|-----------------|
| 1 | TX+ | Transmit Data |
| 2 | TX- | |
| 3 | RTS+ | Request To Send |
| 4 | RTS- | |
| 5 | GND | Signal Ground |
| 6 | RX+ | Receive Data |
| 7 | RX- | |
| 8 | CTS+ | Clear To Send |
| 9 | CTS- | |

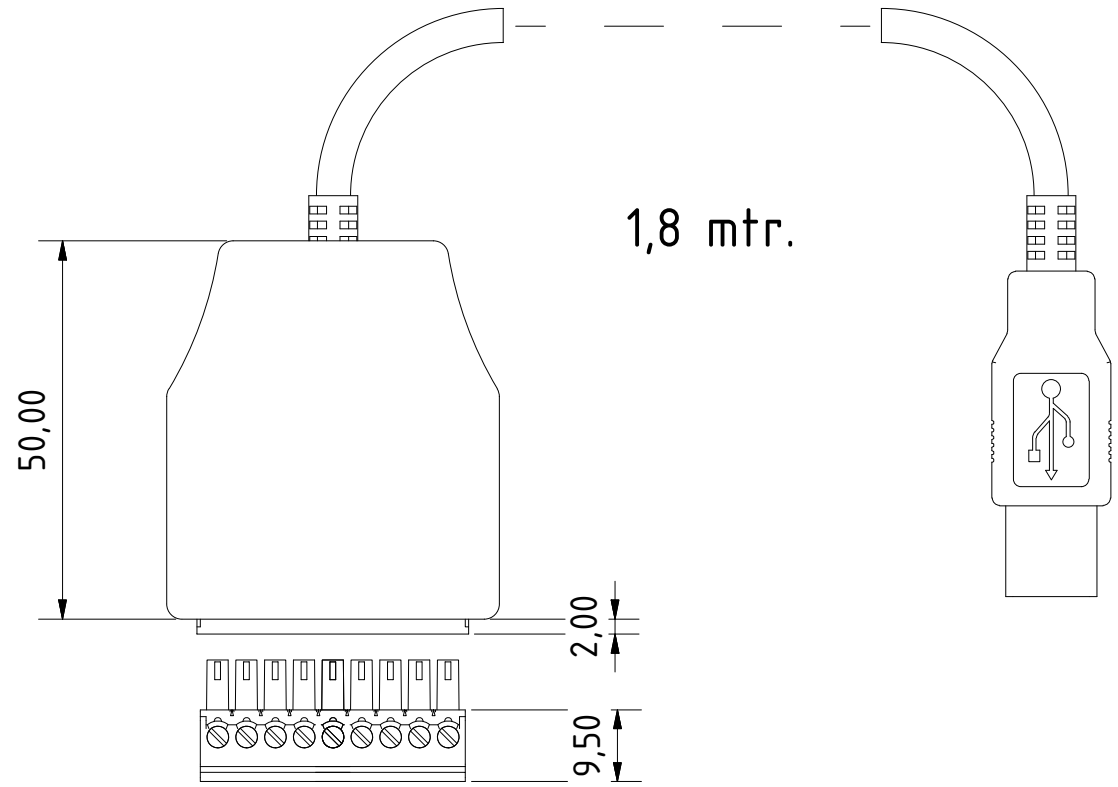


including
 MC 1,5/ 9-ST-3,81
 Phoenix connector

USB
 Type A

Monitoring Data Rate: 300 bps to 2 Mbps
 Comm. Settings Support: 7 / 8 bit data, 1 / 2 stop bits, Odd/Even/Mark/Space/ No Parity
 Operating temperature: -40°C to 85°C
 Certifications: CE approval
 Compliances: RoHS, REACH
 WEEE-Reg.-Nr. DE: 98451581



| | | | | | | | | | | | | | | | | | | | |
|---|---|------------|-------------------|---|----------|----|----|----------------------------------|------------|----|----|---------------|----------|----|-------|------------|-------|------|-------|
| Toleranzen nach DIN ISO 2768-1m | | Maßstab | Oberfläche: | | | | | | | | | | | | | | | | |
| Datum | | Name | Material: | | | | | | | | | | | | | | | | |
| Bearb. | 2016-09-29 | MF | Docklight Tap 485 | | | | | | | | | | | | | | | | |
| Geprüft | 2016-09-29 | OH | | | | | | | | | | | | | | | | | |
| Norm | | | | | | | | | | | | | | | | | | | |
|  www.fuh-edv.de | | | #300694651 | | | | | | | | | | | | | | | | |
| <table border="1"> <tr><td>03</td><td>correction: baudrate 2Mbit/s, WEEE RegNo.</td><td>29.09.16</td><td>MF</td></tr> <tr><td>02</td><td>correction: signal level, layout</td><td>11.10.2015</td><td>MF</td></tr> <tr><td>01</td><td>First release</td><td>31.05.14</td><td>MF</td></tr> <tr><td>Zust.</td><td>Änderungen</td><td>Datum</td><td>Name</td></tr> </table> | | | 03 | correction: baudrate 2Mbit/s, WEEE RegNo. | 29.09.16 | MF | 02 | correction: signal level, layout | 11.10.2015 | MF | 01 | First release | 31.05.14 | MF | Zust. | Änderungen | Datum | Name | 1 / 1 |
| 03 | correction: baudrate 2Mbit/s, WEEE RegNo. | 29.09.16 | MF | | | | | | | | | | | | | | | | |
| 02 | correction: signal level, layout | 11.10.2015 | MF | | | | | | | | | | | | | | | | |
| 01 | First release | 31.05.14 | MF | | | | | | | | | | | | | | | | |
| Zust. | Änderungen | Datum | Name | | | | | | | | | | | | | | | | |
| Flachmann und Heggelbacher | | | A3 | | | | | | | | | | | | | | | | |