

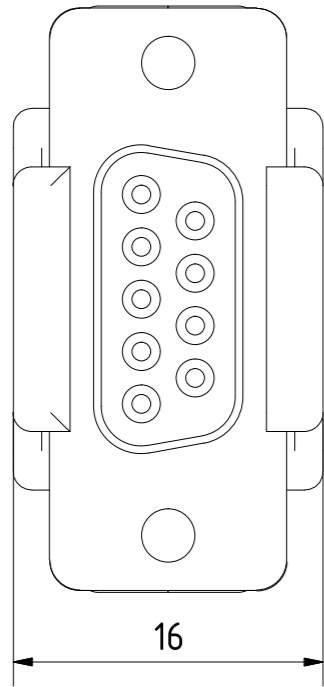





Device 1  
Sub D9  
female

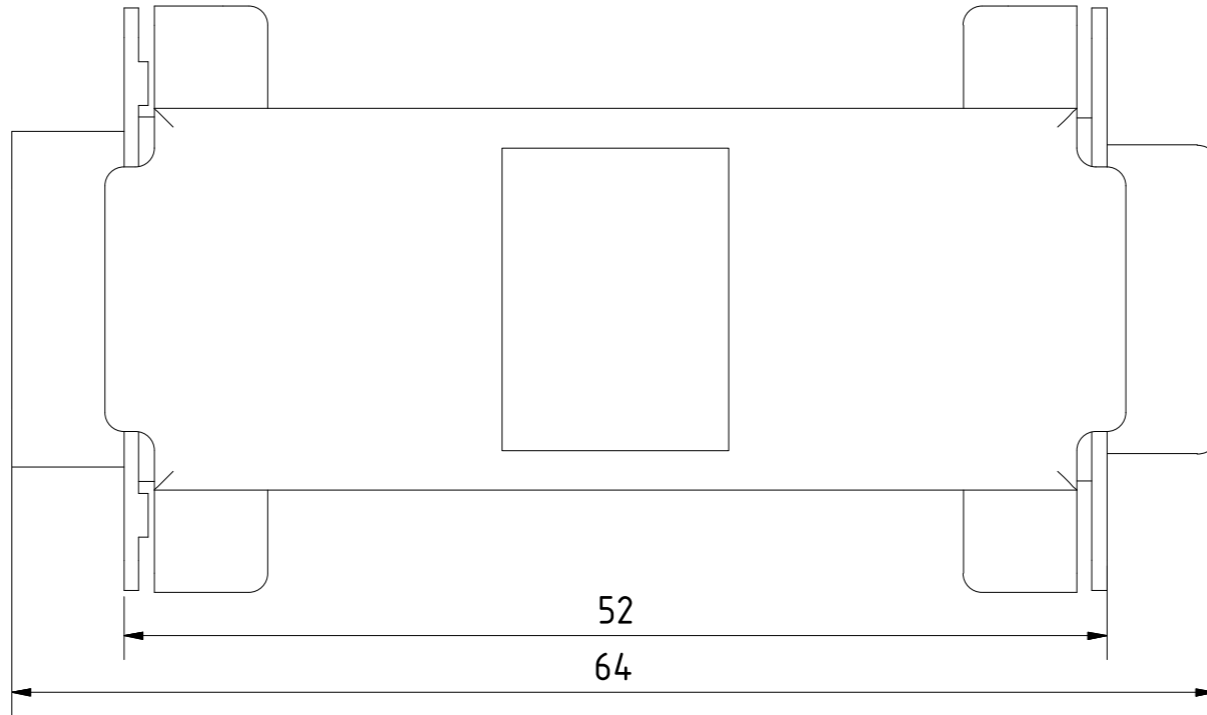

Device 2  
Sub D9  
male

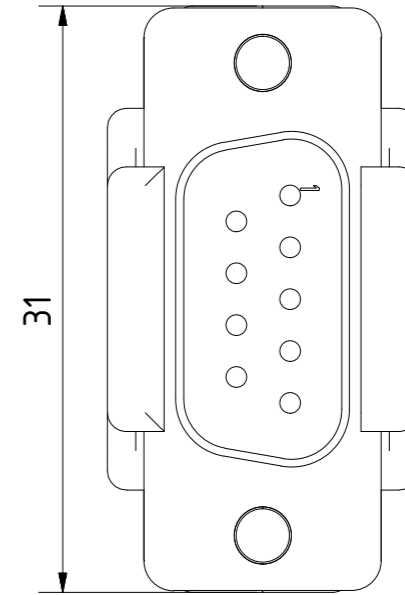

Pin No.	Signal name
1	DCD
2	RX
3	TX
4	DTR
5	SGND
6	DSR
7	RTS
8	CTS
9	RI

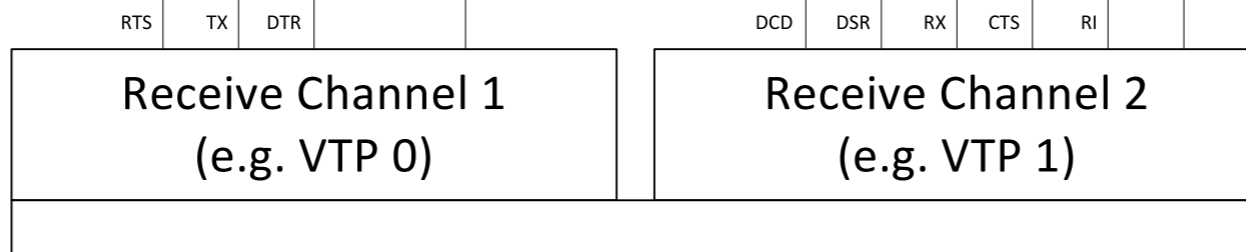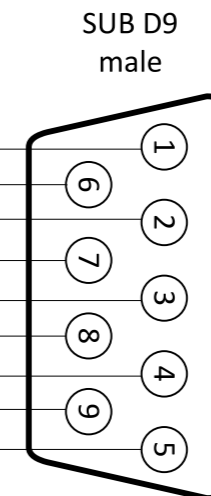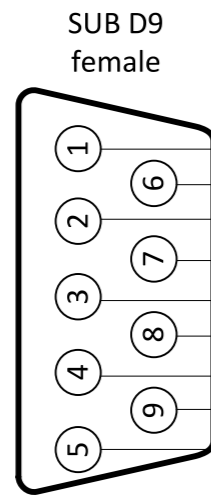


Receive Channel 1  
(e.g. VTP 0)

Receive Channel 2  
(e.g. VTP 1)

Monitoring Data Rate: up to 1 Mbps  
 Comm. Settings Support: 7 / 8 bit data, 1 / 2 stop bits, Odd/Even/Mark/Space/ No Parity  
 Operating temperature: -40 C to 85 C  
 Certifications: CE approval  
 Compliances: RoHS, REACH  
 WEEE-Reg.-Nr. DE: 98451581



Mini USB



				Toleranzen nach DIN ISO 2768-1c	Ma stab	Oberfl che:
				Datum	Name	Material:
				Bearb. 2018-10-07	MF	Docklight Tap Pro with 1.8m "Mini-B" USB cable
				Gepr ft 2018-10-07	OH	
05	Updated wire diagram	07.10.18	MF	Norm		
04	correction: baudrate 1MBit/s, WEEE Reg.No.	29.09.16	MF			#300609409
03	Corrective Revision (baudrates)	21.08.14	MF			
02	Corrective Revision	20.02.14	MF			
01	First release	12.02.14	MF			Artikel-Nr.:
Zust.	nderungen	Datum	Name	Flachmann und Heggelbacher		1 / 1



F:\Inventor\Docklight-Tap\Docklight-TapPro-DhneSchaltplan.idw

#300609409

1 / 1  
A3