

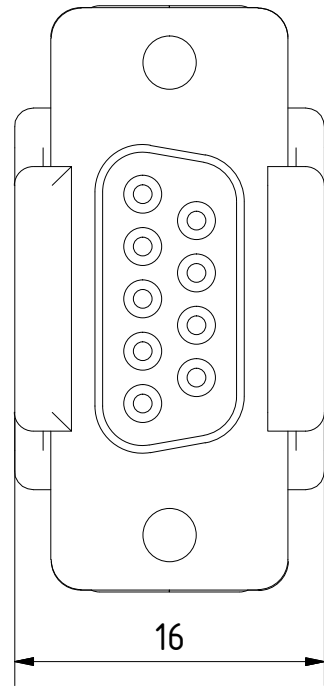


Device 1
Sub D9
female

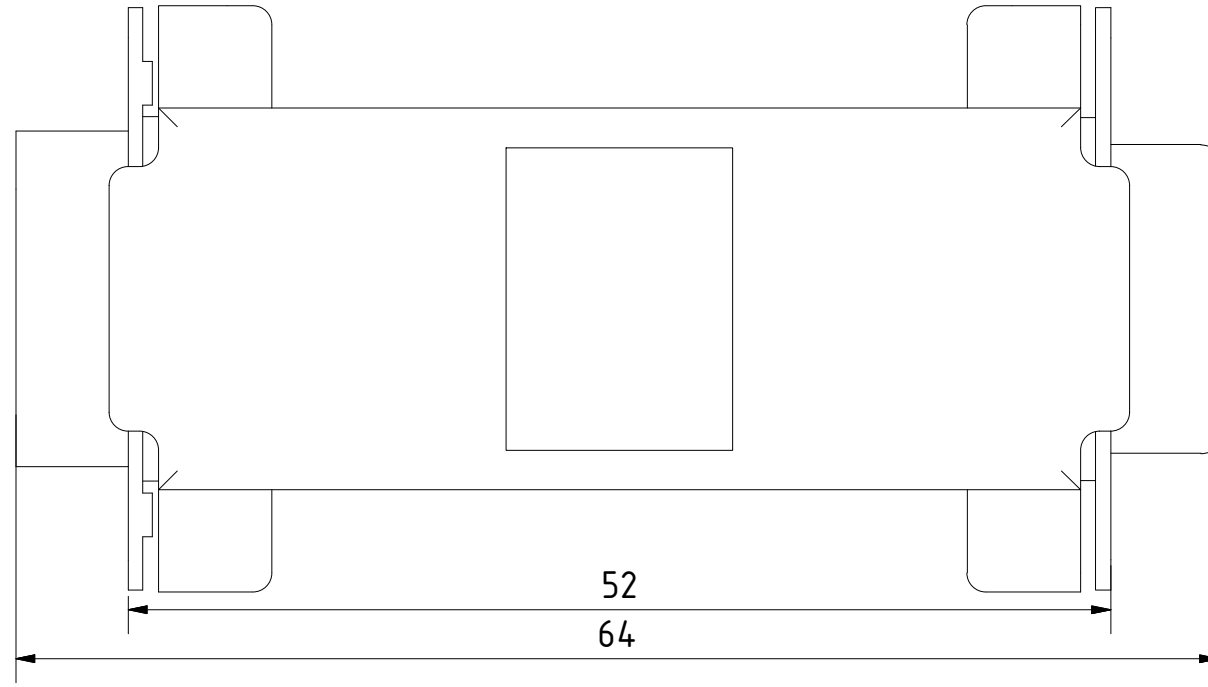


Device 2
Sub D9
male

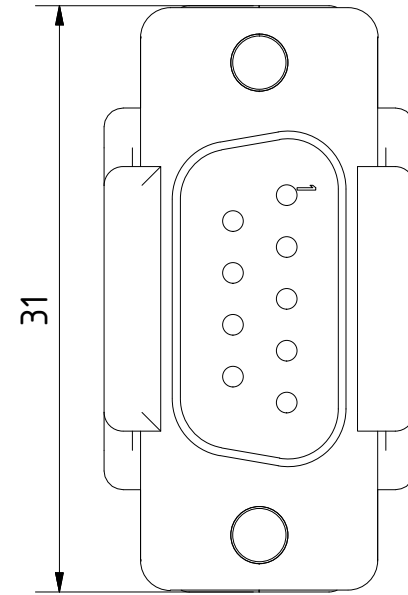

Pin No. Signal name

1	DCD
2	RX
3	TX
4	DTR
5	SGND
6	DSR
7	RTS
8	CTS
9	RI

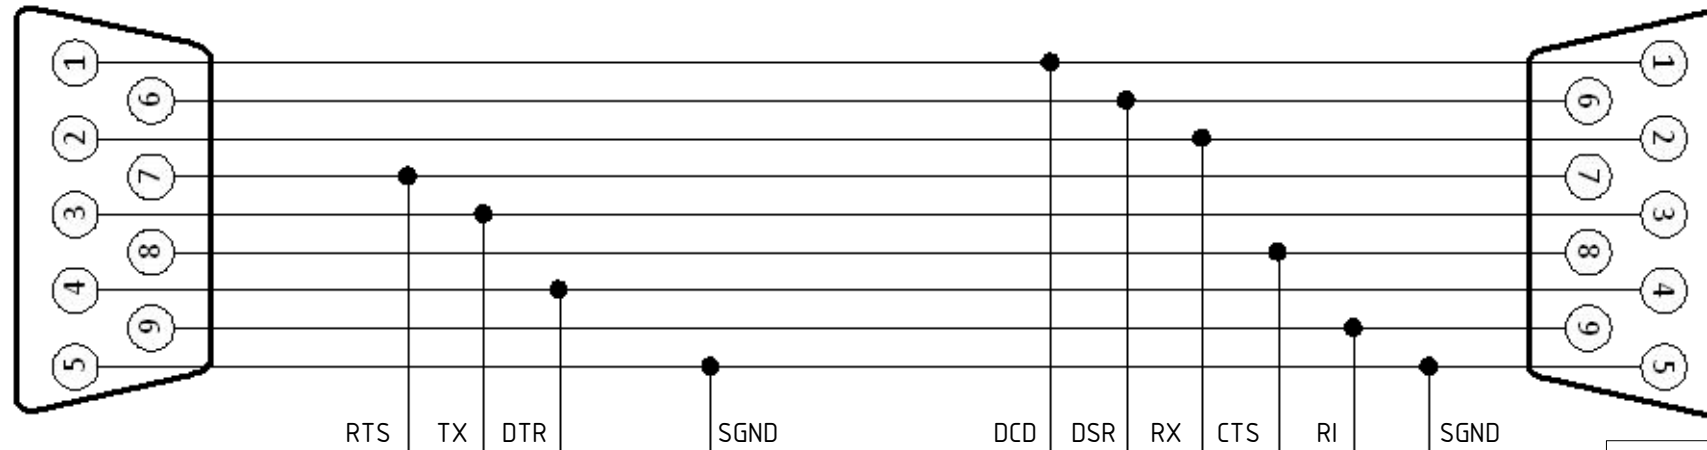

Receive Channel1
(e.g. VTP0)


Receive Channel2
(e.g. VTP1)


Monitoring Data Rate: up to 1 Mbps
Comm. Settings Support: 7 / 8 bit data, 1 / 2 stop bits, Odd/Even/Mark/Space/ No Parity
Operating temperature: -40°C to 85°C
Certifications: CE approval
Compliances: RoHS, REACH
WEEE-Reg.-Nr. DE: 91575955

Docklight and Docklight Scripting Project Settings:
Docklight Monitoring Mode
Receive Channel 1 = VTP0
Receive Channel 2 = VTP1
(or similar VTP index as shown in the dropdown list)



Mini USB



				Toleranzen nach DIN ISO 2768-1c	Maßstab	Oberfläche:
				Datum	Name	Material:
07	Update WEEE Reg.No	10.07.22	MF	Bearb.	2022-07-10	MF
06	added project settings	15.09.19	MF	Geprüft	2022-07-10	OH
05	Updated wire diagram	07.10.18	MF	Norm		
04	correction: baudrate 1MBit/s, WEEE Reg.No.	29.09.16	MF			
03	Corrective Revision (baudrates)	21.08.14	MF			
02	Corrective Revision	20.02.14	MF			
01	First release	12.02.14	MF			
Zust.	Änderungen	Datum	Name	 www.fuh-edv.de		

Docklight Tap Pro
with 1.8m "Mini-B" USB cable

#300609409

1 / 1

Artikel-Nr.:

A3

I:\Docklight - Tap\Docklight - TapPro.dwg